




GM1029

SOT-23 場效應晶體管(SOT-23 Field Effect Transistors)

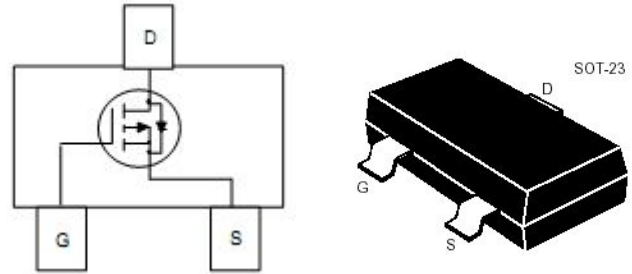

**P-Channel Enhancement-Mode MOS FETs**

P 沟道增强型 MOS 场效应管

■ **MAXIMUM RATINGS 最大額定值**

Characteristic 特性參數	Symbol 符號	Rate 額定值	Unit 單位
Drain-Source Voltage 漏極-源極電壓	$BV_{DSS}$	-100	V
Gate- Source Voltage 柵極-源極電壓	$V_{GS}$	$\pm 20$	V
Drain Current (continuous) 漏極電流-連續	$I_D$	-1.5	A
Drain Current (pulsed) 漏極電流-脉冲	$I_{DM}$	-5	A
Total Device Dissipation 總耗散功率 $T_A=25^\circ\text{C}$ 環境溫度為 $25^\circ\text{C}$	$P_D$	1250	mW
Junction 結溫	$T_J$	150	$^\circ\text{C}$
Storage Temperature 儲存溫度	$T_{stg}$	-55to+150	$^\circ\text{C}$

■ **DEVICE MARKING 打標**

**GM1029=1029**



GM1029

■ELECTRICAL CHARACTERISTICS 電特性

( $T_A=25^{\circ}\text{C}$  unless otherwise noted 如無特殊說明，溫度為  $25^{\circ}\text{C}$ )

Characteristic 特性參數	Symbol 符號	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Drain-Source Breakdown Voltage 漏極-源極擊穿電壓( $I_D = -250\mu\text{A}, V_{GS}=0\text{V}$ )	$BV_{DSS}$	-95	—	—	V
Gate Threshold Voltage 柵極開啓電壓( $I_D = -250\mu\text{A}, V_{GS}=V_{DS}$ )	$V_{GS(th)}$	-1	—	-3	V
Diode Forward Voltage Drop 內附二極管正向壓降( $I_S = -1.5\text{A}, V_{GS}=0\text{V}$ )	$V_{SD}$	—	—	-1.2	V
Zero Gate Voltage Drain Current 零柵壓漏極電流( $V_{GS}=0\text{V}, V_{DS} = -80\text{V}$ )	$I_{DSS}$	—	—	-1	$\mu\text{A}$
Gate Body Leakage 柵極漏電流( $V_{GS}=\pm 20\text{V}, V_{DS}=0\text{V}$ )	$I_{GSS}$	—	—	$\pm 100$	nA
Static Drain-Source On-State Resistance 靜態漏源導通電阻( $I_D = -2\text{A}, V_{GS} = -10\text{V}$ )	$R_{DS(ON)}$	—	290	300	$\text{m}\Omega$
Static Drain-Source On-State Resistance 靜態漏源導通電阻( $I_D = -1.8\text{A}, V_{GS} = -4.5\text{V}$ )	$R_{DS(ON)}$	—	300	330	$\text{m}\Omega$
Input Capacitance 輸入電容 ( $V_{GS}=0\text{V}, V_{DS} = -15\text{V}, f=1\text{MHz}$ )	$C_{ISS}$	—	900	—	pF
Output Capacitance 輸出電容 ( $V_{GS}=0\text{V}, V_{DS} = -15\text{V}, f=1\text{MHz}$ )	$C_{OSS}$	—	100	—	pF
Turn-On Delay Time 開啓延遲時間 ( $V_{DS}=-30\text{V}, I_D=-1\text{A}, R_{GEN}=3\Omega, V_{GS}=-10\text{V}$ )	$t_{d(on)}$	—	38	—	ns
Turn-On Rise Time 開啓上升時間 ( $V_{DS}=-30\text{V}, I_D=-1\text{A}, R_{GEN}=3\Omega, V_{GS}=-10\text{V}$ )	$t_r$	—	18	—	ns
Turn-Off Delay Time 關斷延遲時間 ( $V_{DS}=-30\text{V}, I_D=-1\text{A}, R_{GEN}=3\Omega, V_{GS}=-10\text{V}$ )	$t_{d(off)}$	—	51	—	ns
Turn-On Fall Time 開啓下降時間 ( $V_{DS}=-30\text{V}, I_D=-1\text{A}, R_{GEN}=3\Omega, V_{GS}=-10\text{V}$ )	$t_f$	—	6	—	ns

Pulse Width $\leq 300\mu\text{s}$ ; Duty Cycle $\leq 2.0\%$